




Quadra LED

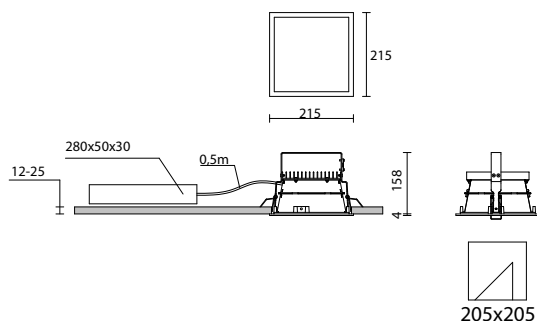

570800?	DK.LED 10L30K	LED 3000K	>80	910lm	61lm/W	15W	1,20
570900?	DK.LED 10L40K	LED 4000K	>80	910lm	61lm/W	15W	1,20
571000?	DK.LED 20L30K	LED 3000K	>80	1820lm	73lm/W	25W	1,20
571100?	DK.LED 20L40K	LED 4000K	>80	1820lm	73lm/W	25W	1,20

..... ? . 6 – DALI / ES DIM

..... ? 1 – BIAŁY / WHITE • 2 – SZARY MATOWY / SATIN MATT GRAY • 9 – RAL

■ PL

Oprawa do montażu w stropie.

OBUDOWA: odbłyśnik z blachy aluminiowej, matowej MIRO zamknięty dyfuzorem opalowym, obudowa aluminiowa, lakierowana proszkowo.

ŹRÓDŁO: diody LED, trwałość eksploatacyjna 50 000h pracy, CRI >80, SDCM 3.

ZASILACZ: umieszczony poza oprawą, połączenie z oprawą na stałe przewodem o długości l=0.5m.

PRZEZNACZENIE: oświetlenie ogólne pomieszczeń i ciągów komunikacyjnych w budynkach użyteczności publicznej, hotelach, galeriach handlowych, itp.

TECHNOLOGIA 3S: save money, save energy, save time.

■ GB

Light fixture for ceiling recessed installation.

BODY: high quality matt aluminium MIRO reflector, opal diffuser and aluminium casing powder coated.

LIGHT SOURCE: LEDs with 50,000 hrs life time, CRI >80, SDCM 3.

POWER SUPPLY: placed out of the light fixture, fixed with the unit with 0.5 m long cable.

USE: standard downlight, perfect for halls, back-rooms, staircases and corridors with false ceiling.

3xS TECHNOLOGY: save money, save energy, save time.

Zabezpieczenie prądowe Circuit-breaker		10A	16A
Maksymalna ilość opraw Max. amount of luminaires	570800?	43	69
	570900?		
	571000?	22	35
	571100?		

